


➤ Digging Clamshell Grabs

Model	Content (SAE) L	Weight (kg)	Grab Width (mm)	Grab Opening (mm)	Number of Teeth	Max Grab Capacity (t)	Excavator Weight Class (t)
DCS05-300	35	125	300	790	3	1	1-2
DCS05-400	40	135	400	790	3	1	1-2
DCS1-300	60	140	300	950	3	1	1-5
DCS1-400	80	150	400	950	3	1	1-5
DCS1-500	100	160	500	950	5	1	1-5
DCS2-270	90	250	270	1300	3	2	5-9
DCS2-300	100	255	300	1300	3	2	5-9
DCS2-400	135	270	400	1300	3	2	5-9
DCS2-500	170	285	500	1300	5	2	5-9
DCS2-600	205	300	600	1300	5	2	5-9
DCS3-300	140	570	300	1445	3	2	9-15
DCS3-400	185	585	400	1445	3	2	9-15
DCS3-500	230	610	500	1445	5	2	9-15
DCS3-600	275	625	600	1445	5	2	9-15
DCS3-700	320	640	700	1445	7	2	9-15
DCS3-800	365	660	800	1445	7	2	9-15
DCS4-300	180	675	300	1690	3	4	13-21
DCS4-400	240	720	400	1690	3	4	13-21
DCS4-500	300	750	500	1690	3	4	13-21
DCS4-600	360	780	600	1690	5	4	13-21
DCS4-700	420	855	700	1690	5	4	13-21
DCS4-800	480	885	800	1690	7	4	13-21
DCS4-900	540	915	900	1690	7	4	13-21
DCS4-1000	600	945	1000	1690	9	4	13-21
DCS5-400	340	1275	400	2005	3	6	22-30
DCS5-500	430	1325	500	2005	3	6	22-30
DCS5-600	520	1370	600	2005	5	6	22-30
DCS5-800	700	1390	800	2005	7	6	22-30
DCS5-1000	880	1465	1000	2005	9	6	22-30
DCS5-1200	970	1675	1200	2005	11	6	22-30

Featuring interchangeable shells

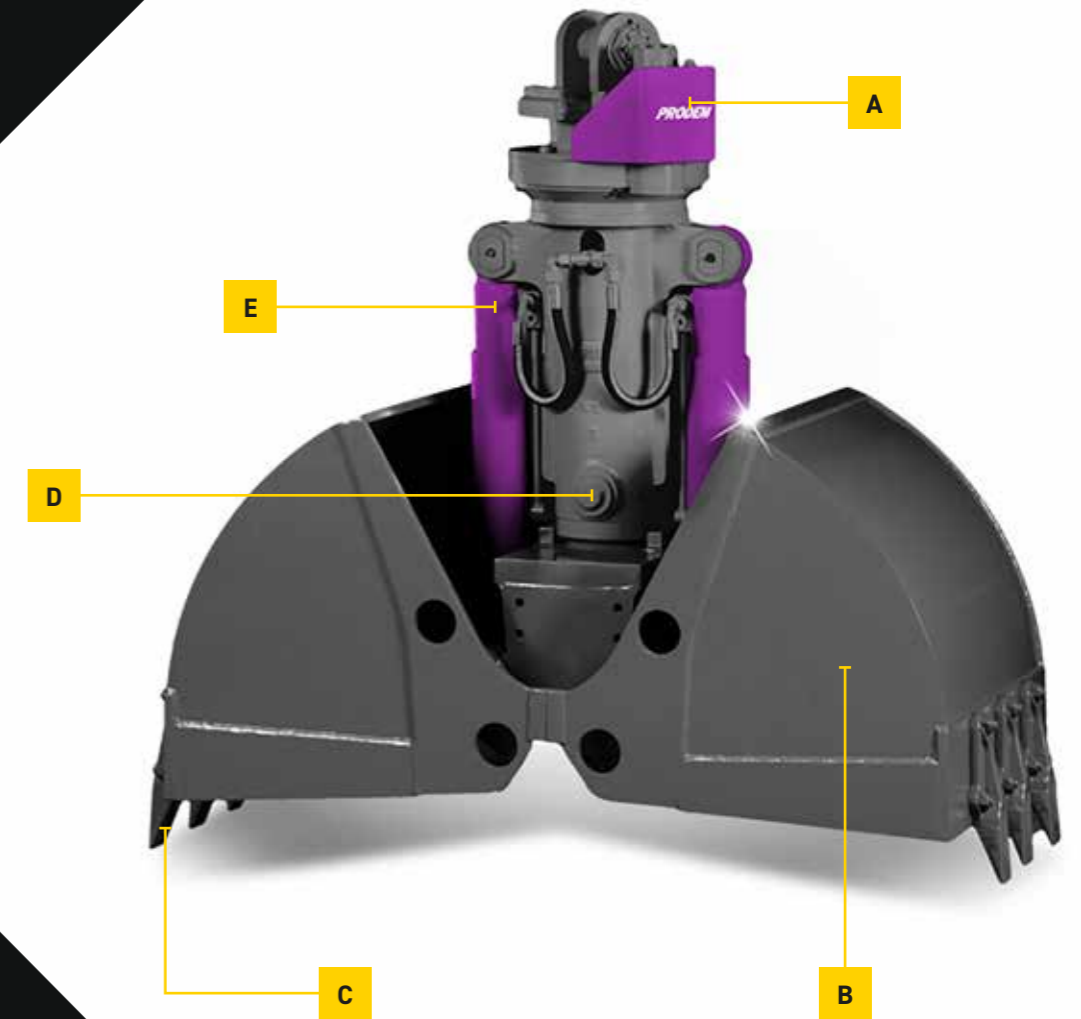

Product features

- A** Fully protected compact rotary motor, endless hydraulic rotation with integrated pressure limitation
- B** Extension Shafts and Clay Scrapers available
- C** Bolt-on replaceable forged teeth
- D** All models throughout the range have interchangeable digging shells that can be changed by 3 point quick hitch system
- E** Ram guard offers full protection of cylinders



PRODEM.