


# Rotating Pulverisers

	PHP050R	PHP160R	PHP200R	PHP250R	PHP350R	PHP450R
Working Weight (kg)	550	1250	1780	2300	2950	4219
Overall Length (mm)	1382	1840	2078	2468	2663	3075
Jaw Width - Fixed (mm)	465	384	438	470	532	550
Jaw Width - Moving (mm)	208	330	350	346	370	398
Max Jaw - Opening (mm)	508	720	766	925	1056	1142
Cutting Blade - Length (mm)	100	240	240	360	360	1107
Required Oil Flow (lpm)	50-80	100-180	150-250	150-250	200-300	200-300
Max Operating Pressure (bar)	210	320	320	320	320	350
Crushing Force - tip (t)	50	100	170	196	224	333
Excavator Weight Class (t)	4.5-8	13-20	17-28	22-30	28-40	40-65

## Product features

- A** Hardened teeth made from special materials for enhanced durability
- B** Large bolt on tooth style (PHP250R upwards) for quick and effective replacement
- C** Cracking tooth on the outer end of jaw for high productivity
- D** Jaw design leaves re-bar steel clean
- E** Wide jaw opening
- F** Bolt on Ground Engaging Teeth (PHP250R upwards)
- G** Fully reversible steel cutting blades
- H** Trunnion type cylinder for maximum breaking force throughout jaw closing motion, as well as opening motion
- I** Integrated speed-up valve for increased speed and performance
- J** Large diameter slew ring

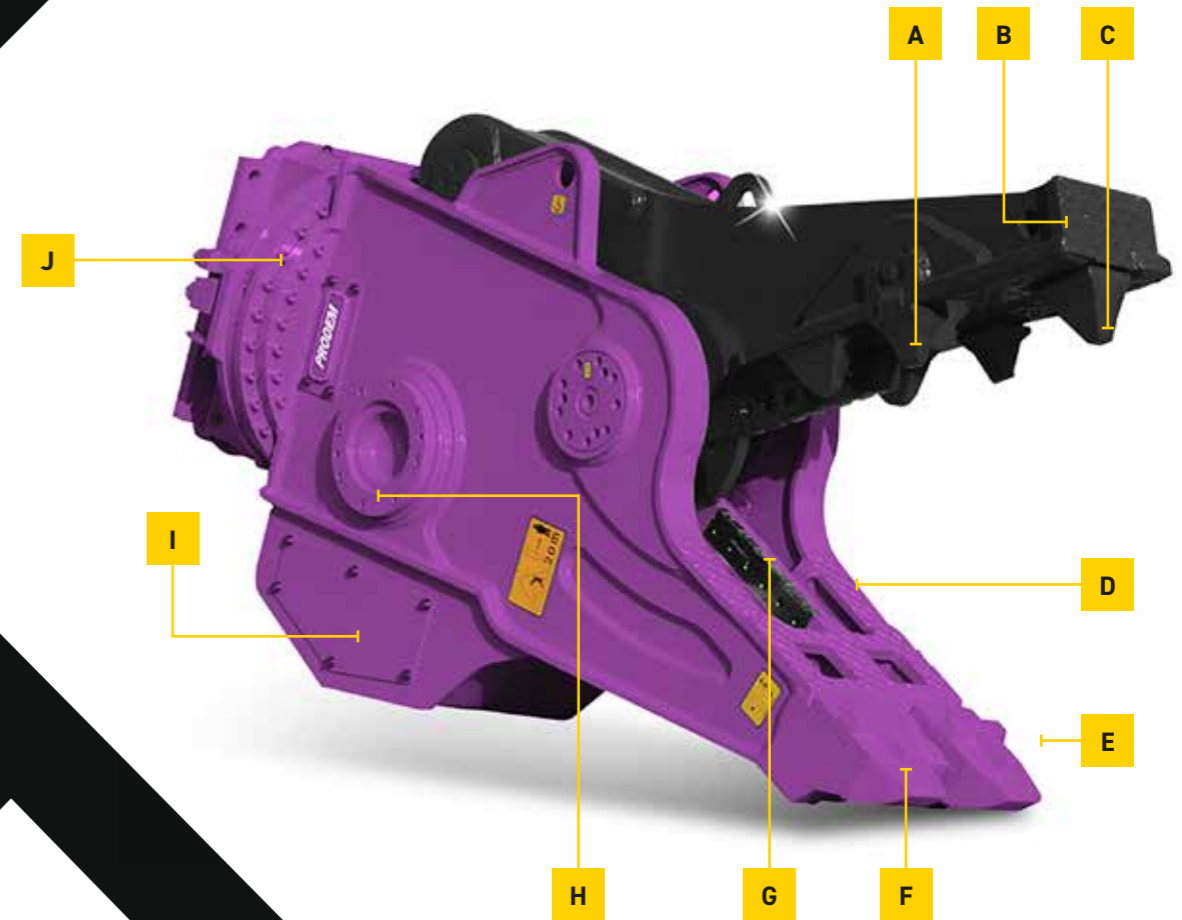

**PRODEM.**