


Timber Grabs

	TG 028-L	TG 035-L	TG 040	TG 050	TG4 500	TG4 650	TG4 800	TG4 1000	TG4.6 800	TG4.6 1000
Working Weight (kg)	185	235	455	485	965	1015	1085	1145	1400	1480
Volume (m3)	0.28	0.35	0.4	0.5	0.5	0.65	0.8	1	0.8	1
Max Grab Capacity (t)	4	4	5	5	4	4	4	4	6	6
Max Load - Rotation (t)	4	4	5	5	15	15	15	15	15	15
Max Operating Pressure - Rotation (bar)	250	250	250	250	140	140	140	140	140	140
Max Operating Pressure - Open/Close (bar)	250	250	250	250	350	350	350	350	350	350
Height - Closed (mm)	1060	1190	1355	1420	2460	2540	2710	2820	2880	2950
Height - Open (mm)	980	1115	1140	1180	2010	2050	2135	2190	2215	2265
Min. Log Diameter (mm)	90	100	150	180	150	150	200	210	50	90
Max Opening (mm)	1280	1950	1085	1145	1820	1950	2255	2445	2380	2540
Material Handler Weight Class (t)	2-7	2-7	8-14	8-14	18-25	18-25	18-25	18-25	22-35	22-35
Excavator Weight Class (t)	2-7	2-7	8-14	8-14	15-21	15-21	15-21	15-21	20-30	20-30

	TG4.6 1250	TG4.6 1500	TG4.6 1750	TG4.6 2000	TG5.6 1250	TG5.6 1500	TG5.6 1750	TG5.6 2000	TG5.6 2500
Working Weight (kg)	1530	1540	1715	1915	2200	2240	2300	2350	2470
Volume (m3)	1.25	1.5	1.75	2	1.25	1.5	1.75	2	2.5
Max Grab Capacity (t)	6	6	6	6	12	12	12	12	12
Max Load - Rotation (t)	15	15	15	15	26	26	26	26	26
Max Operating Pressure - Rotation (bar)	140	140	140	140	140	140	140	140	140
Max Operating Pressure - Open/Close (bar)	350	350	350	350	350	350	350	350	350
Height - Closed (mm)	3080	3200	3310	3435	3280	3405	3520	3630	3900
Height - Open (mm)	2310	2350	2400	2435	2480	2525	2565	2600	2695
Min. Log Diameter (mm)	110	125	150	240	100	120	140	150	170
Max Opening (mm)	2765	2990	3190	3390	2825	3055	3275	3485	4000
Material Handler Weight Class (t)	22-35	22-35	22-35	22-35	35-65	35-65	35-65	35-65	35-65
Excavator Weight Class (t)	20-30	20-30	20-30	20-30	30-45	30-45	30-45	30-45	30-45

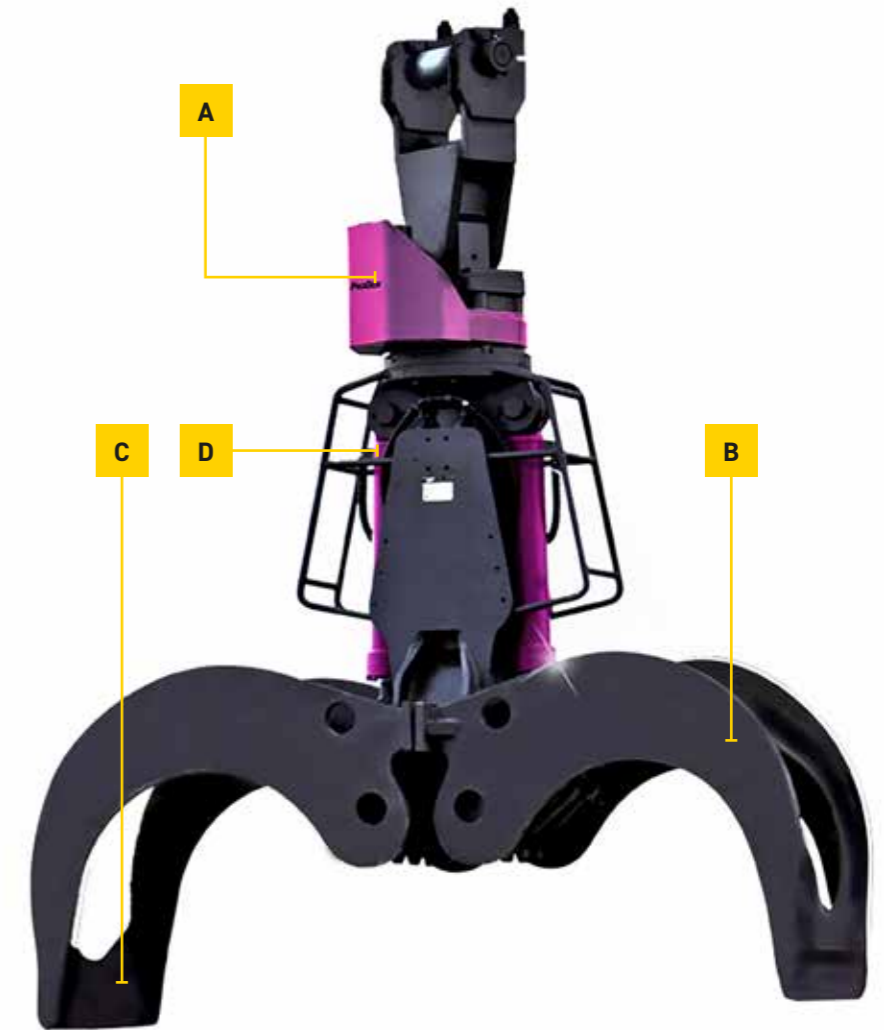

Product features

- A** Fully protected compact rotary motor giving endless hydraulic rotation with integrated pressure limitation
- B** Wear resistant quality materials used for maximum durability and minimum downtime
- C** Interlocking tines allow tight clamping of the log or trunk
- D** Heavy-duty ram and cylinder overstroke add protection



PRODEM.